



RIMROLLER

For drinking enjoyment!

The Kiefel Packaging Rimroller

The highly flexible Kiefel Packaging Rimroller has a wide range of applications. The mobility of the safety paneling and the format cassette allows fast and easy product changeover.

With one drive for all 3 worm drive shafts. The heating is divided into 4 individually adjustable heating zones.

Robust and precise. Simple and safe operation.



Your benefits


- Fast product changeover
- Defined worm drive orientation
- Worm drive can be positioned Wduring production
- Central worm drive
- Positionable and individually adjustable heating zones
- Support rollers for increasing pressure during rim-rolling

Machine features

- + Electrical worm drive
- + Inlet conveyor with sensors for speed regulation
- + Ceramic heating elements
- + Touchscreen control panel
- + Fast changeable format cassette

Additional equipment

- + Turning station
- + Counting device
- + Manual packing table

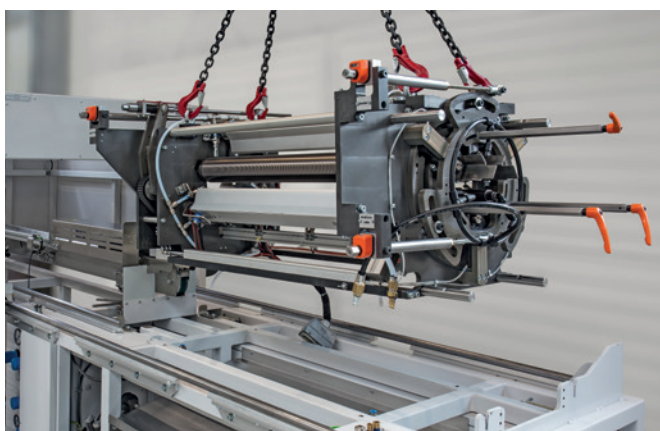

Technical data

Article diameter

Rimroller

50 – 120 mm

Material

PET, PP

Performance:

up to 2000 cups per min.

Dimensions (packed)

4020 x 1350 x 2150 mm

Weight (incl. tooling)

1240 kg