




OSTOMY BAGS MACHINE

Optimized solution for colostomy, ileostomy and urostomy pouches

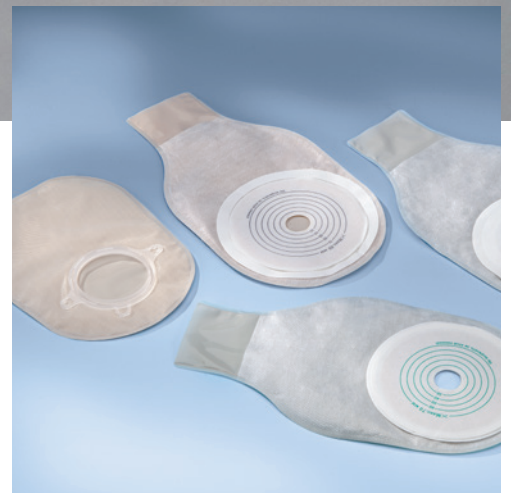

- For closed or open bags, with e.g. inspection windows, activated charcoal filters for venting and odor prevention, soft adhesive adapters or hard plastic flanges, different materials and film layers, or label applications
- Smart welding force control
- Particle reducing technology
- Printing station: flexible or fixed print; labelling
- Intelligent quality control system

KIT Colostomy bag machine

(example)

technical data



Welding technology

Thermo-Contact

Maximum welding area

700 x 275 mm

Dimension (L x W x H) approx.

10,200 x 4,000 x 2,460 mm

Operation

2-up

Output approx.

up to 2,400 bags/hour